

NITRILE GENTLE TOUCH PRO DARK BLUE



NITRILE	DARK BLUE	POWDER FREE	S-XL	AMBIDEXTROUS	NON STERIL
----------------	------------------	--------------------	-------------	---------------------	-------------------

Comfortable nitrile glove. It offers protection against specific chemical risks and against solvents in sporadic contact. It offers a wide variety of general uses highlighting medical use, examination, food handling, lab, cleaning, etc. Special thickness

Characteristics:

Suitable for latex allergic people.	full textured. Making easy grip.
Dark blue, powder free, single use, ambidextrous	High durability and resistance. Extra thickness
Rolled Edge, protection against spills.	Flexibility and adaptability.

Packaging:

- 100 pieces par dispenser, with a petrochemical opening for a hygienic access to the glove.
- Packaging contains: 10 dispensers of 100 units
- Dimension: 210 x 70 x 120 mm



Labelling: Manufacturing date, expiration date, batch number, reference and EAN code. Product name in several languages: Spanish, English, French, German, Italian, Portuguese.

CE marking, protection pictograms, safety standards and legislation. Size, size guide and units.

REF	Colour	Size	Size Number	EAN
0504	BLUE	S	7	8435234005040
0505	BLUE	M	8	8435234005057
0506	BLUE	L	9	8435234005064
0507	BLUE	XL	10	8435234005071
0503	BLUE	XXL	11	8435234005033

RUBBEREX SPAIN S.L

+34 96 166 7124

info@rubberex.es

www.rubberex.es

Polígono Industrial Masía del Baló. C/Mas Vallesa de Mandor N8 Nave12. CP. 46190. Ribarroja del Turia. Valencia. España

Normative:

- Category III. Marca CE mark according to Regulation (EU) 2016/425.
- Class I. Royal Decree 2017/745 which regulates sanitary products, which transposes Directive 93/42 CEE.
- Complies with food handling requirements. 10/2011 of 14 January 2011 on plastic material and articles intended to come into contact with food.
- ASTM F1671 y ASTM F1670. Standard Test Method for Resistance of Materials Used in Protective Clothing to Penetration by Blood-Borne Pathogens Using Phi-X174 Bacteriophage Penetration as a Test System
- ISO 16604:2004. Bacteriophage.
- EN ISO 374-1:2016/A1:2018. Point 7 EN 374-2. Point 5 standard EN374-4. Method UNE-EN 16523-1:2015.
- EN ISO 374-5:2016
- EN420:2003+A1:2009
- EN455-1-2-3

CHEMICAL RESISTANCE

PERMEATION. EN ISO 374-1:2016/A1.2018

Gloves are classified in terms of time of passage, according to each individual chemical for which the glove resists permeation:

CHEMICALS	LEVEL	LETTER
N-HEPTANE	6	J
40 PER CENT SODIUM HYDROXIDE	6	K
30 PER CENT HYDROGEN PEROXIDE	6	P

Performance Level:

Time (min)	> 10	> 30	> 60	> 120	> 240	> 480
Performance Level	1	2	3	4	5	6

DEGRADATION

Degradation % (DR) is determined for each chemical made in the permeation.

(DR) J: n-Heptane= 52.01 %

(DR) K: 40% Sodium Hydroxide = -50.99 %

(DR) P: 30% Hydrogen Peroxide = 37.91 %

RUBBEREX SPAIN S.L


NITRILE GENTLE TOUCH PRO DARK BLUE



The “Gentle Touch Nitrile Pro”, nitrile glove PPE should be used to protect the user’s hand against chemical risks (products and levels mentioned above) and against microbiological risks (bacteria, fungi and virus).

The present PPE should never be used against other risks than those described above. The use of his PPE should be evaluated correctly depending on the place of work.

EN ISO 374-1:2016:A1:2018 / EN ISO 374-5:2016
Type B

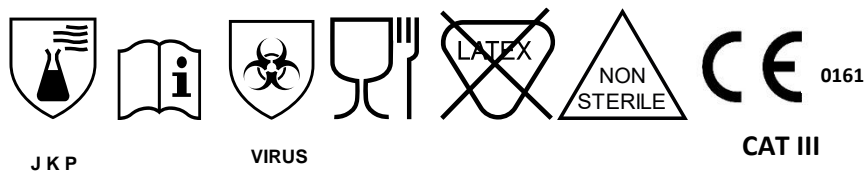

Glove Dimension	S	M	L	XL
Palm width mm	85 ± 5 mm	95 ± 5 mm	110 ± 5 mm	110 ± 5 mm
Length mm	Min 240 mm	Min 240 mm	Min 240 mm	Min 240 mm
Palm thickness mm (± 0.02)	0.12	0.12	0.12	0.12
Finger thickness mm (± 0.02)	0.13	0.13	0.13	0.13
Cuff thickness mm (± 0.02)	0.08	0.08	0.08	0.08
Weight gr. (± 0.3)	4.4	4.6	5.0	5.4

Design



packaging:

100 gloves per dispenser 10
dispensers per case 1000 gloves per
case

Palet: 63cases

Rev 0089 may 2023.

RUBBEREX SPAIN S.L

+34 96 166 7124

info@rubberex.es

www.rubberex.es

Polígono Industrial Masía del Baló. C/Mas Vallesa de Mandor N8 Nave12. CP. 46190. Ribarroja del Turia. Valencia. España