

NEOPRENE/LATEX	BLACK	REF:NEO400	M-XXL	FLOCKLINED
----------------	-------	------------	-------	------------

Chloroprene coated over natural Rubber, heavy weight industrial rubber glove. Specially blended rubber compound. Excellent grip in wet and oily environment. Available in orange.

Characteristics:

Contain latex protein. Not suitable for latex allergic people.	Raised diamond pattern for better sustained grip.
Resistance of neoprene and comfort of latex.	Resistance oil and facts.
Flock line. Interior for comfort.	Excellent grip.
Chloroprene coated over natural rubber.	Abrasion and resistance against certain chemicals.

Packaging:

- Carton 100 pairs.
- Individual bag.
- Packaging contains: 10 pack of 10 pcs
- Dimension bag: 390 x 140 x 20 mm



Labelling:

Manufacturing date, expiration date, batch number, reference, and EAN code. Product name in several languages: Spanish, English, French, German, Italian, Portuguese, etc.

Ce marking, Protection Pictograms, Safety standars and legislation. Size and units, size guide.



Gloves Dimensions	S	M	L	XL	XXL
Lenght	Min 320 mm	Min 320 mm	Min 320 mm	Min 320 mm	Min 320 mm
Thickness palm mm (± 0.02)	0.68	0.68	0.68	0.68	0.68

RUBBEREX SPAIN S.L

+34 96 166 7124

info@rubberex.es

www.rubberex.es

Polígono Industrial Masía del Baló. C/Mas Vallesa de Mandor N8 Nave12. CP. 46190. Ribarroja del Turia. Valencia. España

Regulations:

Regulation (EU) 2016/425. Personal protective equipment repealing Council Directive 89/686/EEC.

EN ISO 21420:2020

EN 388:2016+A1:2018. Protection against mechanical hazards.

A: Abrasion resistance (performance level 0 to 4).

B: Resistance to cutting by blade (performance level 0 to 5).

C: Resistance to tearing (performance level 0 to 4).

D: Puncture resistance (performance level 0 to 4)

E: Resistance to sharp cut (level A to F) X means not tested.

Chemical resistance:

PERMEATION EN 16523-1:2015. CHEMICAL HAZARDS EN ISO 374-1:2016+A1:2018

Gloves are classified in terms of breakthrough time, according to each individual chemical for which the glove resists permeation.

The gloves are tested against the following chemicals:

CHEMICALS	LETTER	LEVEL
ACETONE	B	3
SODIUM HYDROXIDE 40%	K	6
SULPHURIC ACID 96%	L	4
AMMONIA 25%	O	4
HYDROGEN PEROXIDE 30%	P	6
FORMALDEHYDE 37%	T	6
METHANOL	A	4
N-HEPTANE	J	2

Time (min)	> 10	> 30	> 60	> 120	> 240	> 480
Level	1	2	3	4	5	6

DEGRADATION EN 374-4:2019

Degradation % (DR) is determined for each chemical made in the permeation.

(DR) B : Acetone = 40.8%

(DR) K : Sodium Hydroxide 40% = -10.0%

(DR) L : Sulphuric Acid 96% = 13.8%

(DR) O : Ammonia 25% = -34.1%

(DR) P : Hydrogen Peroxide 30% = 6.1%

(DR) T : Formaldehyde 37% = -7.6%

RUBBEREX SPAIN S.L

EN 388: 2016+A1:2018



2111X

EN ISO 374-1:2016+A1:2018/Type A



BKLOPT

EN ISO 374-5:2016



VIRUS





The NEO400 PPE should be used to protect the user's hand against chemical risks (products mentioned above) and against microbiological risks (bacteria and fungi).

The present PPE should be used against other risks than those described above. The use of this PPE should be evaluated correctly depending on the place of work.

The performance levels stated for the gloves are based on tests carried out on the palm area of the glove. Before putting on gloves, make sure they are free of defects, punctures or tears. Discard the glove if it is punctured or torn during work.

REF	Colour	Size	Size number	EAN
0238	BLACK	M	8	9556073202625
0239	BLACK	L	9	9556073202632
0240	BLACK	XL	10	9556073202649
0241	BLACK	XXL	11	9556073202656

Packing:

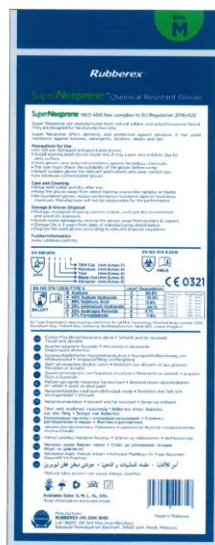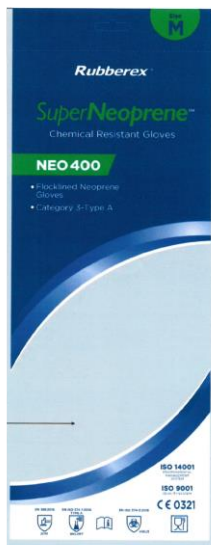

Logistic:

Carton: 100 pairs

Pack: 10 pairs

Pallet: 40 cartons